

深圳市晨木实业有限公司

SHENZHEN CHENMU INDUSTRY CO., LTD.

深圳市龙华区福城街道大水坑社区一村 300 号沃特思厂房 5 栋 2 楼

[Http://www.chenmubattery.com](http://www.chenmubattery.com)

Primary Lithium Battery

ER34615M 3.6V 14.5Ah

3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Power Type

For higher drain/pulse operating applications requesting superior voltage response in -55°C ~+ 85°C environments

Cell size references	UM1-R20-D
Alternative models	LST33600

Electrical characteristics

(Typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity 14.5Ah

(At 5mA +20°C, 2.0V cut off. The capacity restored varies according to current, temperature, cut off) Open circuit voltage (At 20°C) 3.66V Nominal voltage (At 5mA +20°C) 3.6 V Max. continuous current (at +20°C) 2000mA Typical Max. continuous current (at +20°C) 3000mA

Pulse capability: Typically up to 3000mA (3000mA/0.1second pulses drained every 2min at 20°C from cells with 100µA base current, yield voltage readings above 3.0V. The readings may vary according to pulse characteristics, temperature and cell's previous history. Fitting the cell with a

Available terminal suffix radial tabs, radial pins, axial leads, flying leads

capacitor may be recommended in severe conditions. Consult ACT if necessary)

Storage (recommended) +30°C(+86°F)Max

Operating temperature range -55°C~+85°C
(High and low temperature will lower the capacity and load voltage.) -76°F~+185°F

Physical characteristics

深圳市晨木实业有限公司


SHENZHEN CHENMU INDUSTRY CO., LTD.

深圳市龙华区福城街道大水坑社区一村 300 号沃特思厂房 5 栋 2 楼

[Http://www.chenmubattery.com](http://www.chenmubattery.com)

Diameter(Max) 34mm(1.34in) Height(Max) 61.5mm(2.42in) Typical weight 105g(3.4oz)

ER34615M

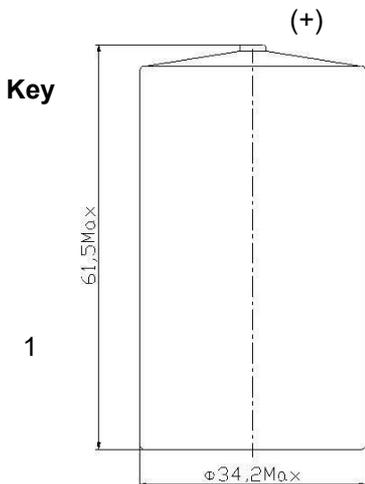

features

- >High and stable load voltage
- >Superior drain capacity
- >Low self-discharge rate (less than 1% after year of storage at 20°C)
- >Stainless steel container
- >Hermetic glass-to-metal sealing
- >Notch technology for safety vent is recommended

>Non-flammable electrolyte

Main applications



- >Radiocommunication and other military applications
- >Alarms and security systems
- >Beacons and emergency location transmitters
- >GPS equipment
- >Metering systems
- >Sonobouys
- >Led lighting applications
- >Others

Storage

- >Cells should be stored in a clean & dry (less than 30% RH) area
- >Temp. should not exceed +30°C

Warning

- >Do not use if cell casing is mangled
- >Do not use different model of cell in series
- >Soldering the tag should be finished in few seconds
- >Do not try to recharge

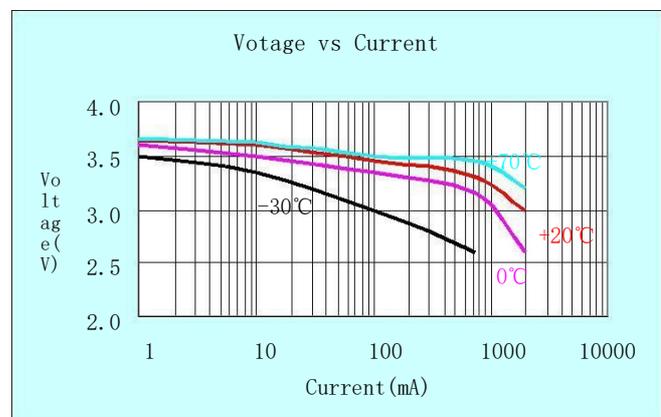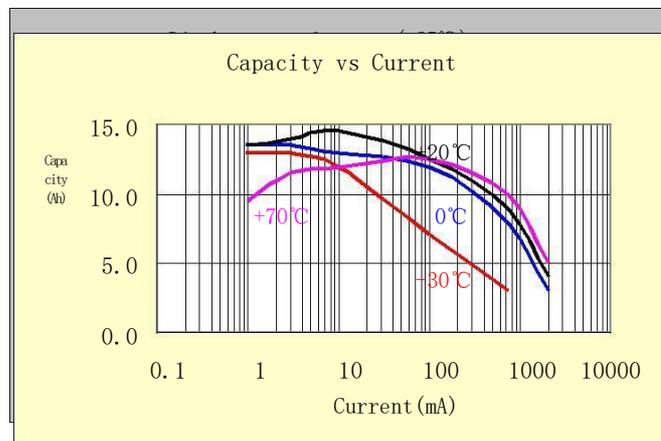



深圳市晨木实业有限公司
SHENZHEN CHENMU INDUSTRY CO., LTD.

深圳市龙华区福城街道大水坑社区一村 300 号沃特思厂房 5 栋 2 楼

[Http://www.chenmubattery.com](http://www.chenmubattery.com)
